



ALTERNATOR PRO35S C/4

three-phase brushless synchronous alternator with AVR - 4 poles

Technical Data Sheet

PRO35S C/4

COMMON DATA

Rated Power at 50Hz	kVA	500
Rated Power at 60Hz	kVA	600
Rated Power Factor		0.8
Nominal Temperature	°C	40
Control System		self excited
Execution		brushless
Regulation Type		AVR
Insulation Class		H
Protection		IP23
Maximum Overspeed	rpm	2250
Overload		110% of rated power for one hour in a cycle of 6 hours
Air Flow Requirement	m ³ /min	54.4 at 50Hz 65.3 at 60Hz
R.F.I. Suppression		Standard EN55011

REGULATION DATA

AVR	HVR30	\
Sensing	three-phase	\
Voltage Regulation	±1%	
Sustained Short Circuit		> 300% of rated current

WINDING DATA

Stator Winding		Double layer with auxiliary winding
Rotor Winding		with damping cage
Winding Pitch		2/3
Number of Leads of Stator		6
Stator Winding Resistance		0.0011 at 20°C
Rotor Winding Resistance		1.15 at 20°C
Exciter Stator Resistance		12.5 at 20°C
Exciter Rotor Resistance		0.095 at 20°C
THD at full load		<3%
THD at no load		<2,5%
Excitation at no load	A _{dc}	0.54
Excitation at full load	A _{dc}	2.3

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

PRO35S C/4

ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	500	500	500	470	550	580	600	600
	kW	400	400	400	376	440	464	480	480
Rated Power in Class F (105°C/40°C)	kVA	450	450	450	420	495	525	540	540
	kW	360	360	360	336	396	420	432	432
Rated Power Standby (150°C/40°C)	kVA	530	530	530	495	575	615	635	635
	kW	424	424	424	396	460	492	508	508
Rated Power Standby (163°C/27°C)	kVA	550	550	550	515	600	640	660	660
	kW	440	440	440	412	480	512	528	528

EFFICIENCY IN CL. H

4/4		94.9%						95.9%
3/4		95.4%						96.2%
2/4		94.1%						94.7%
1/4		90.5%						91.1%

REACTANCES AND TIME CONSTANTS

pcc		0.31						
X _d - dir. axis synchronous	375%	338%	314%	263%	414%	389%	368%	338%
X' _d - dir. axis transient	19.4%	17.5%	16.3%	13.6%	21.5%	20.1%	19.1%	17.5%
X'' _d - dir. axis subtransient	13.3%	12.0%	11.1%	9.3%	14.7%	13.8%	13.1%	12.0%
X _q - quad. axis reactance	232%	209%	194%	162%	256%	240%	228%	209%
T' _{do} - O.C. field time constant	2230ms							
T' _d - Transient time constant	115ms							
T'' _d - Sub-transient time constant	11ms							

MECHANICAL DATA

Bearing non drive end	6316-2RS-C3		
Bearing drive end (B3/B14 form)	6319-2RS1-C3		
Weight of generator	in B2	kg	1262.5
	in B3/B14	kg	1276.5
	in B3/B9	kg	\

PRO35S C/4


MOMENT OF INERZIA

B3/B9	kg·m ²	\
SAE 7½	kg·m ²	\
SAE 8	kg·m ²	\
SAE 10	kg·m ²	\
SAE 11½	kg·m ²	\
SAE 14	kg·m ²	9.386
SAE 18	kg·m ²	9.726
B3/B14	kg·m ²	8.871

POWER VARIATION ACCORDING TO TEMPERATURE AND ALTITUDE


Altitude	Ambient temperature				
	25°C	40°C	45°C	50°C	55°C
< 1000m	1.09	1	0.96	0.93	0.91
1000m - 1500m	1.01	0.96	0.92	0.89	0.87
1500m - 2000m	0.96	0.91	0.87	0.84	0.83
2000m - 3000m	0.9	0.85	0.81	0.78	0.76

WIRING DIAGRAM

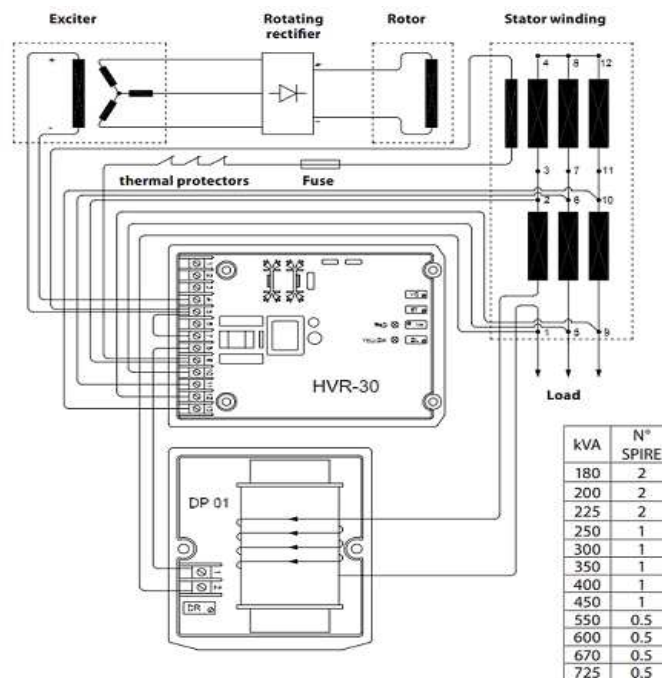


PRO35S C/4

TRANSIENT VOLTAGE VARIATION 50Hz

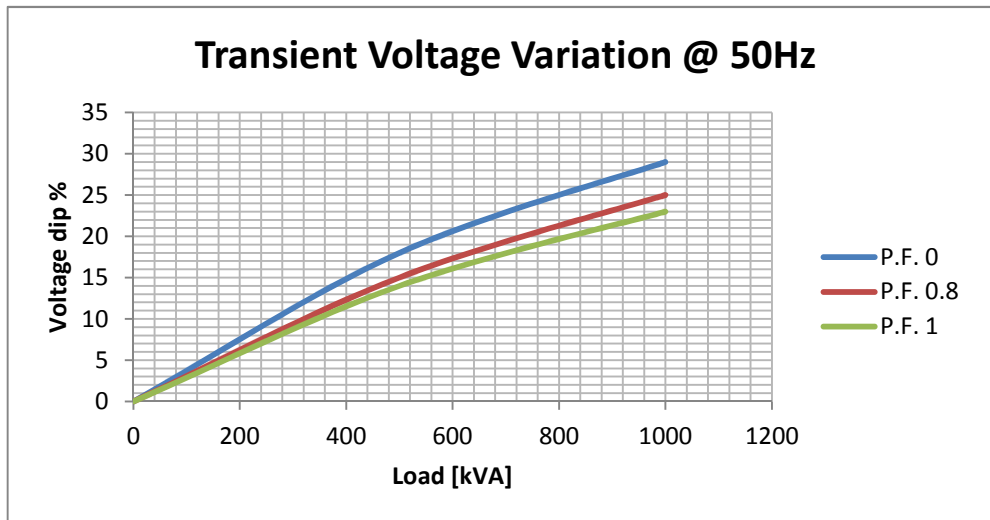


TRANSIENT VOLTAGE VARIATION 60Hz

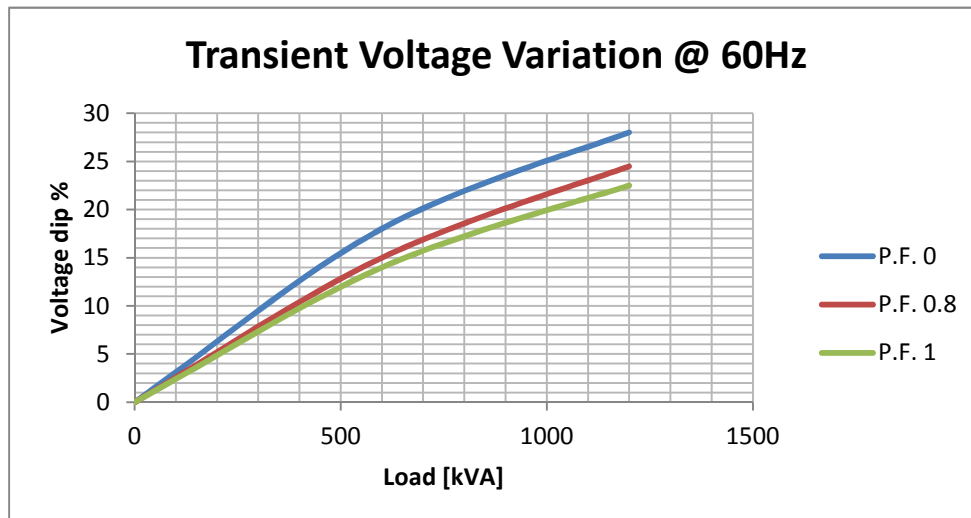


PRO35S C/4


EFFICIENCY 50Hz

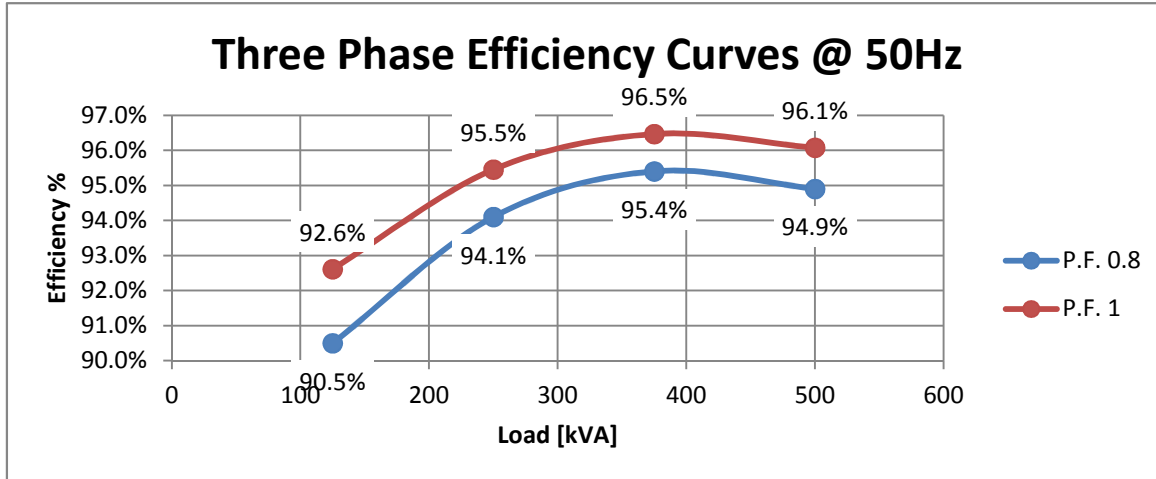


EFFICIENCY 60Hz

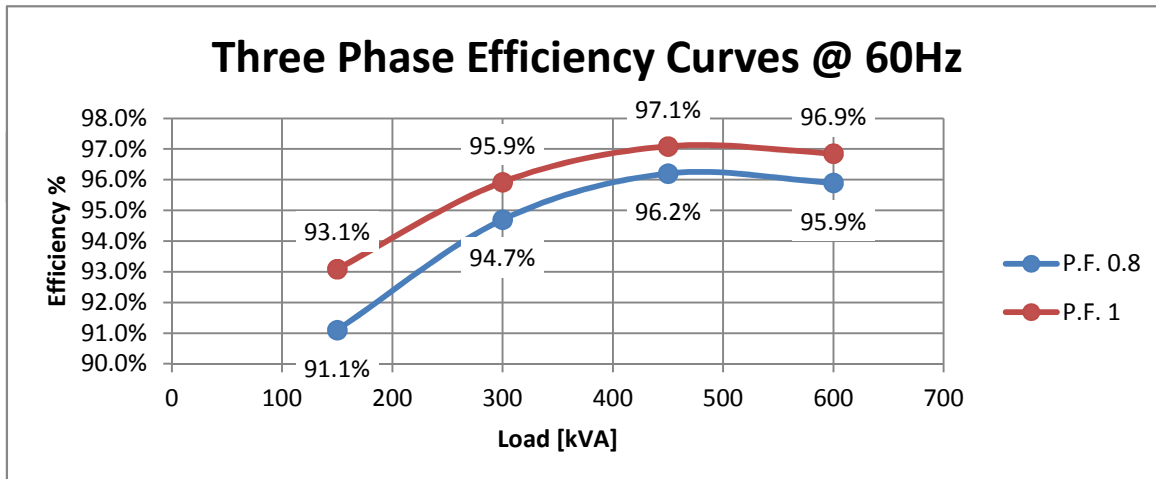

FORMA - FORM B3/B14

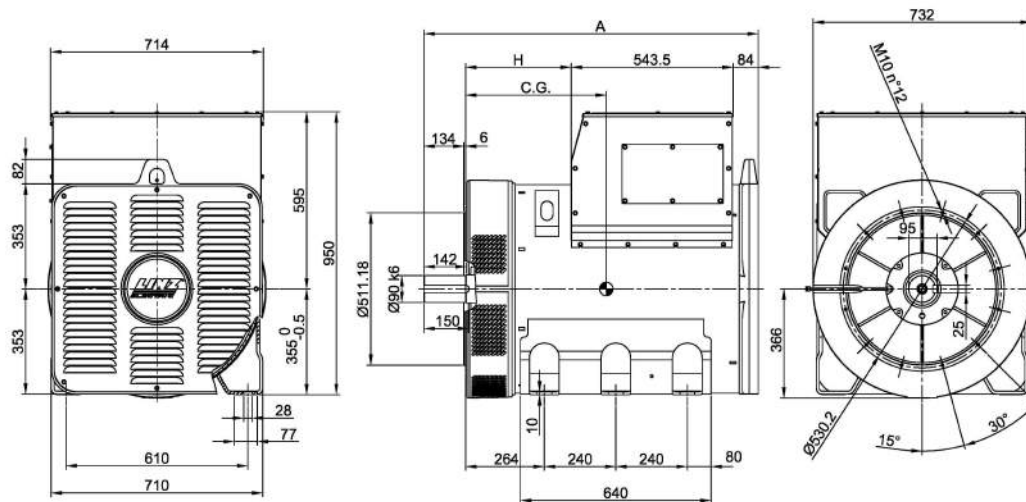

FORMA - FORM SAE

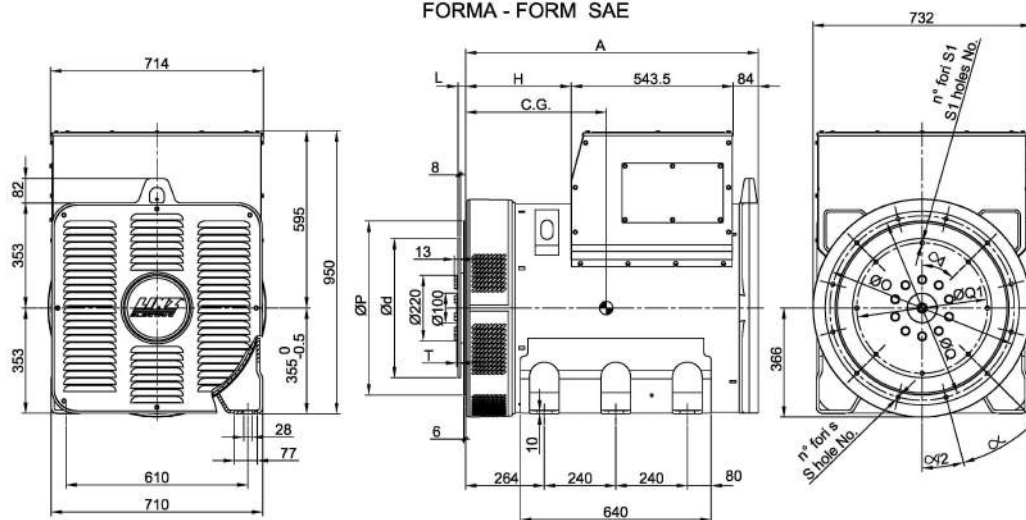

FORMA - FORM		A	H
B3/B14	PRO35 S	1122	354.5
	PRO35 M	1247	479.5
	PRO35 L	1347	579.5
SAE	PRO35 S	982	354.5
	PRO35 M	1107	479.5
	PRO35 L	1207	579.5

SAE	FLANGIE - FLANGES - BRIDAS					
N.	Ø O	Ø P	Ø Q	n. fori holes No.	S	α
0	710	647.7	679.5	16	14	22.5°
1/2	650	584.2	619.2	12	14	30°
1	552	511.18	530.2	12	12	30°

SAE N.	GIUNTI A DISCO - COUPLING DISCS - JUNTAS A DISCOS						
	L	Ø d	Ø Q1	n. fori holes No.	S1	α1	T
14	25.4	466.72	438.15	8	14	45°	4.3
18	15.7	571.5	542.92	6	17	60°	14