



ALTERNATOR PRO35S D/4

three-phase brushless synchronous alternator with AVR - 4 poles

Technical Data Sheet

PRO35S D/4

COMMON DATA

Rated Power at 50Hz	kVA	550
Rated Power at 60Hz	kVA	660
Rated Power Factor		0.8
Nominal Temperature	°C	40
Control System		self excited
Execution		brushless
Regulation Type		AVR
Insulation Class		H
Protection		IP23
Maximum Overspeed	rpm	2250
Overload		110% of rated power for one hour in a cycle of 6 hours
Air Flow Requirement	m ³ /min	54.3 at 50Hz 65.2 at 60Hz
R.F.I. Suppression		Standard EN55011

REGULATION DATA

AVR	HVR30	\
Sensing	three-phase	\
Voltage Regulation	±1%	
Sustained Short Circuit		> 300% of rated current

WINDING DATA

Stator Winding		Double layer with auxiliary winding
Rotor Winding		with damping cage
Winding Pitch		2/3
Number of Leads of Stator		12
Stator Winding Resistance		0.0025 at 20°C
Rotor Winding Resistance		1.21 at 20°C
Exciter Stator Resistance		12.5 at 20°C
Exciter Rotor Resistance		0.095 at 20°C
THD at full load		<3%
THD at no load		<2,5%
Excitation at no load	A _{dc}	0.52
Excitation at full load	A _{dc}	2.35

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

PRO35S D/4

ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	550	550	550	500	580	635	660	660
	kW	440	440	440	400	464	508	528	528
Rated Power in Class F (105°C/40°C)	kVA	495	495	495	465	510	575	590	590
	kW	396	396	396	372	408	460	472	472
Rated Power Standby (150°C/40°C)	kVA	580	580	570	540	615	665	695	695
	kW	464	464	456	432	492	532	556	556
Rated Power Standby (163°C/27°C)	kVA	605	605	600	570	640	695	725	725
	kW	484	484	480	456	512	556	580	580

EFFICIENCY IN CL. H

4/4		95.0%						95.9%
3/4		95.5%						96.5%
2/4		94.3%						95.6%
1/4		90.5%						91.4%

REACTANCES AND TIME CONSTANTS

pcc		0.35						
X _d - dir. axis synchronous		398%	359%	334%	270%	422%	411%	391%
X' _d - dir. axis transient		18.8%	17.0%	15.8%	12.8%	20.0%	19.5%	18.5%
X'' _d - dir. axis subtransient		12.2%	11.0%	10.2%	8.3%	12.9%	12.6%	12.0%
X _q - quad. axis reactance		233%	210%	195%	158%	247%	240%	229%
T' _{do} - O.C. field time constant		2298ms						
T' _d - Transient time constant		109ms						
T'' _d - Sub-transient time constant		10ms						

MECHANICAL DATA

Bearing non drive end		6316-2RS-C3
Bearing drive end (B3/B14 form)		6319-2RS1-C3
Weight of generator	in B2	kg
	in B3/B14	kg
	in B3/B9	kg

PRO35S D/4


MOMENT OF INERZIA

B3/B9	kg·m ²	\
SAE 7½	kg·m ²	\
SAE 8	kg·m ²	\
SAE 10	kg·m ²	\
SAE 11½	kg·m ²	\
SAE 14	kg·m ²	10.189
SAE 18	kg·m ²	10.529
B3/B14	kg·m ²	9.674

POWER VARIATION ACCORDING TO TEMPERATURE AND ALTITUDE


Altitude	Ambient temperature				
	25°C	40°C	45°C	50°C	55°C
< 1000m	1.09	1	0.96	0.93	0.91
1000m - 1500m	1.01	0.96	0.92	0.89	0.87
1500m - 2000m	0.96	0.91	0.87	0.84	0.83
2000m - 3000m	0.9	0.85	0.81	0.78	0.76

WIRING DIAGRAM

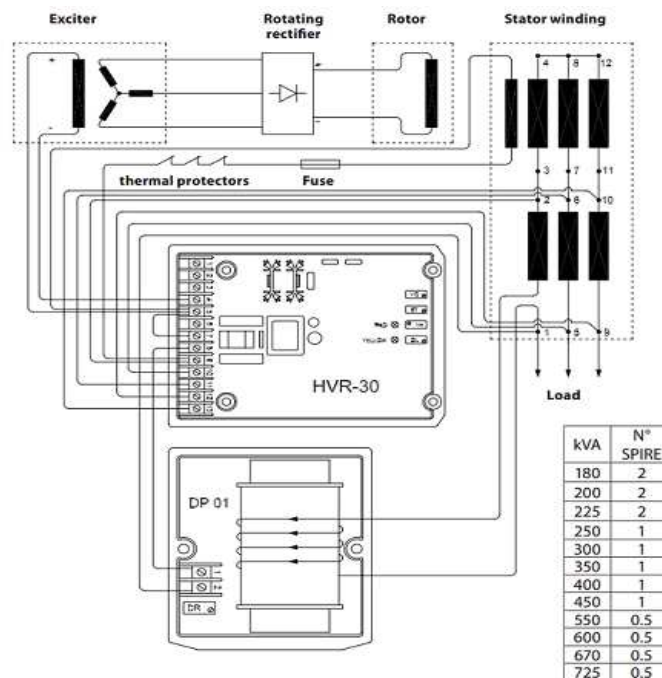


PRO35S D/4

TRANSIENT VOLTAGE VARIATION 50Hz

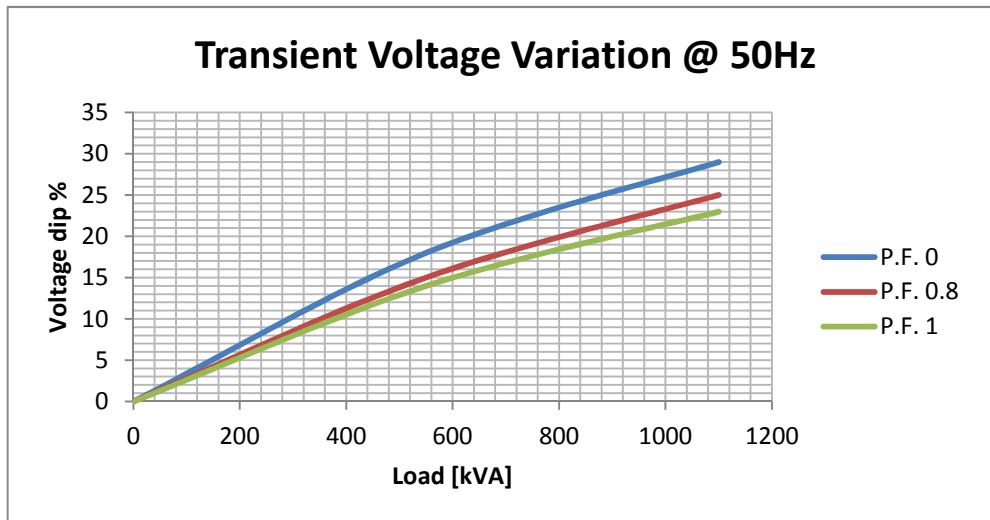


TRANSIENT VOLTAGE VARIATION 60Hz

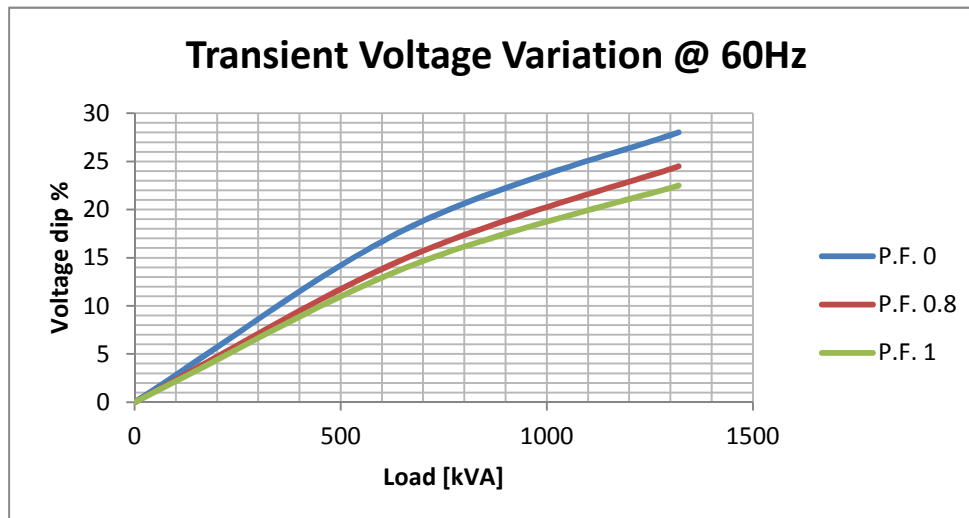


PRO35S D/4

EFFICIENCY 50Hz

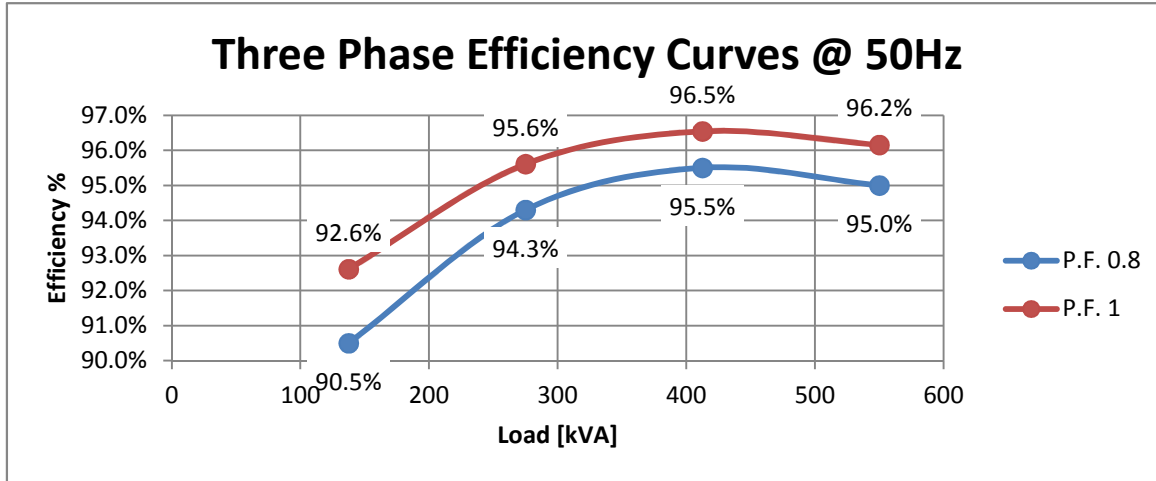


EFFICIENCY 60Hz

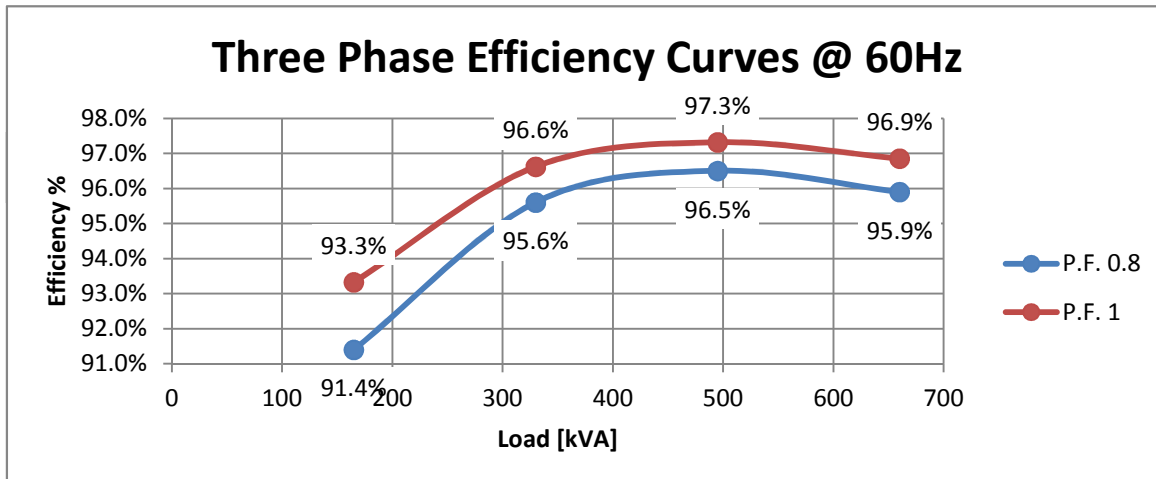


PRO35S D/4

FORMA - FORM B3/B14

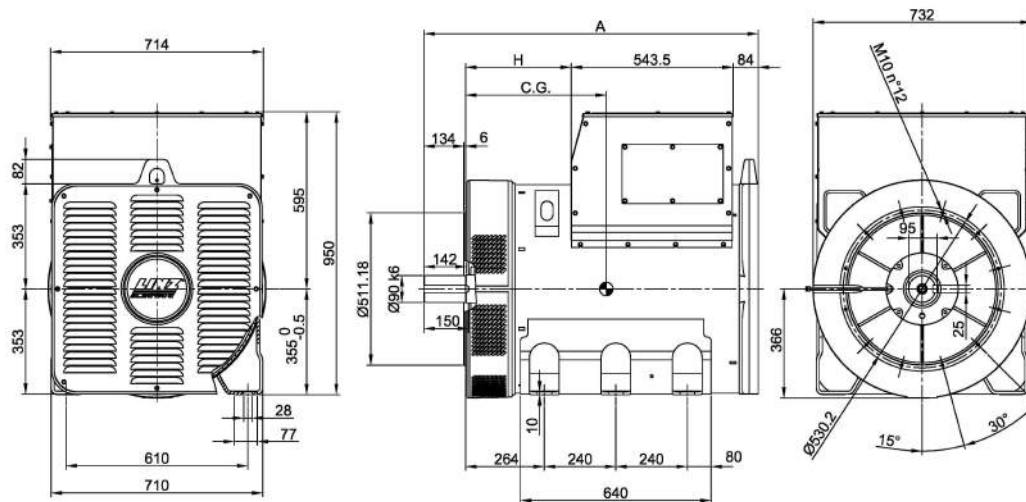

FORMA - FORM SAE

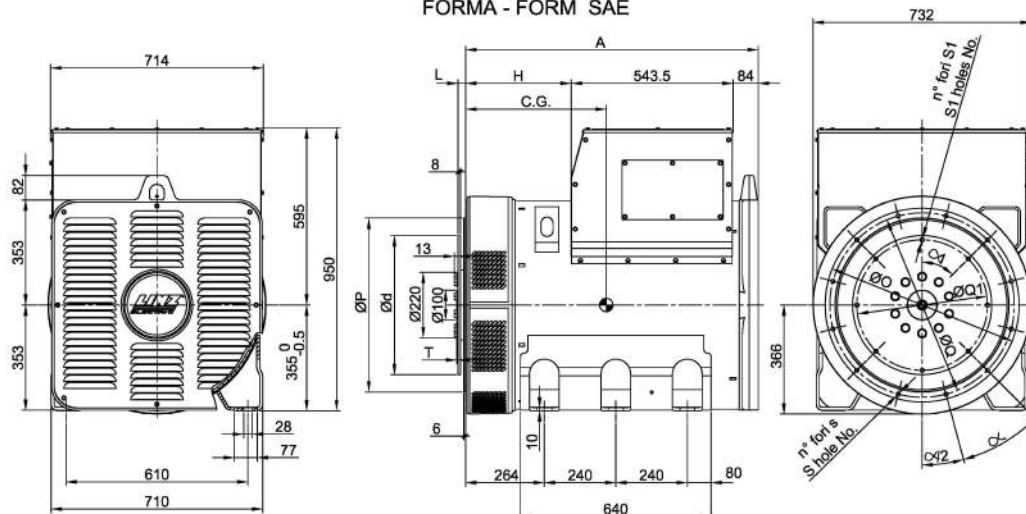

FORMA - FORM		A	H	TIPO - TYPE	C.G.
B3/B14	PRO35 S	1122	354.5	PRO35S B/4	455
	PRO35 M	1247	479.5	PRO35S C/4	465
	PRO35 L	1347	579.5	PRO35S D/4	478
SAE	PRO35 S	982	354.5	PRO35M E/4	516
	PRO35 M	1107	479.5	PRO35M F/4	516
	PRO35 L	1207	579.5	PRO35M G/4	539
				PRO35L H/4	588

SAE N.	FLANGIE - FLANGES - BRIDAS						SAE N.	GIUNTI A DISCO - COUPLING DISCS - JUNTAS A DISCOS						
	Ø O	Ø P	Ø Q	n. fori holes No.	S	α		L	Ø d	Ø Q1	n. fori holes No.	S1	α1	T
O	710	647.7	679.5	16	14	22.5°	14	25.4	466.72	438.15	8	14	45°	4.3
1/2	650	584.2	619.2	12	14	30°	18	15.7	571.5	542.92	6	17	60°	14
1	552	511.18	530.2	12	12	30°								